
SHANNON AIRPORT (EINN)

RUNWAY 06/24 REHABILITATION

For a period of approximately twenty-six weeks, commencing in March 2017, work will be in progress on the Rehabilitation of Runway 06/24 at Shannon Airport.

The work will include the rehabilitation and enhancements to Runway 06/24, including replacement of existing AGL fittings, raising of the drainage channel, reinstatement of the airfield markings and associated ducting and site works.

The working area is indicated in the Appendix to this supplement.

CAT II will not be available for the duration of the works.

If CAT II/Low Visibility conditions occur during planned working hours, work will not take place.

Working hours will generally be 2300-0600 hrs. (local).

Exact dates and times of work will be promulgated by NOTAM, with reference to this Supplement.


Outside working Hours:

The full length of Runway 06/24 will be available as normal.

Runway centreline lighting will not be available.

Temporary surfacing will be in place on portions of the working area.

Pilots should be aware that, although runway markings and visual aids will be reinstated as far as possible, operational or other conditions may prevent full reinstatement at the end of each work period.

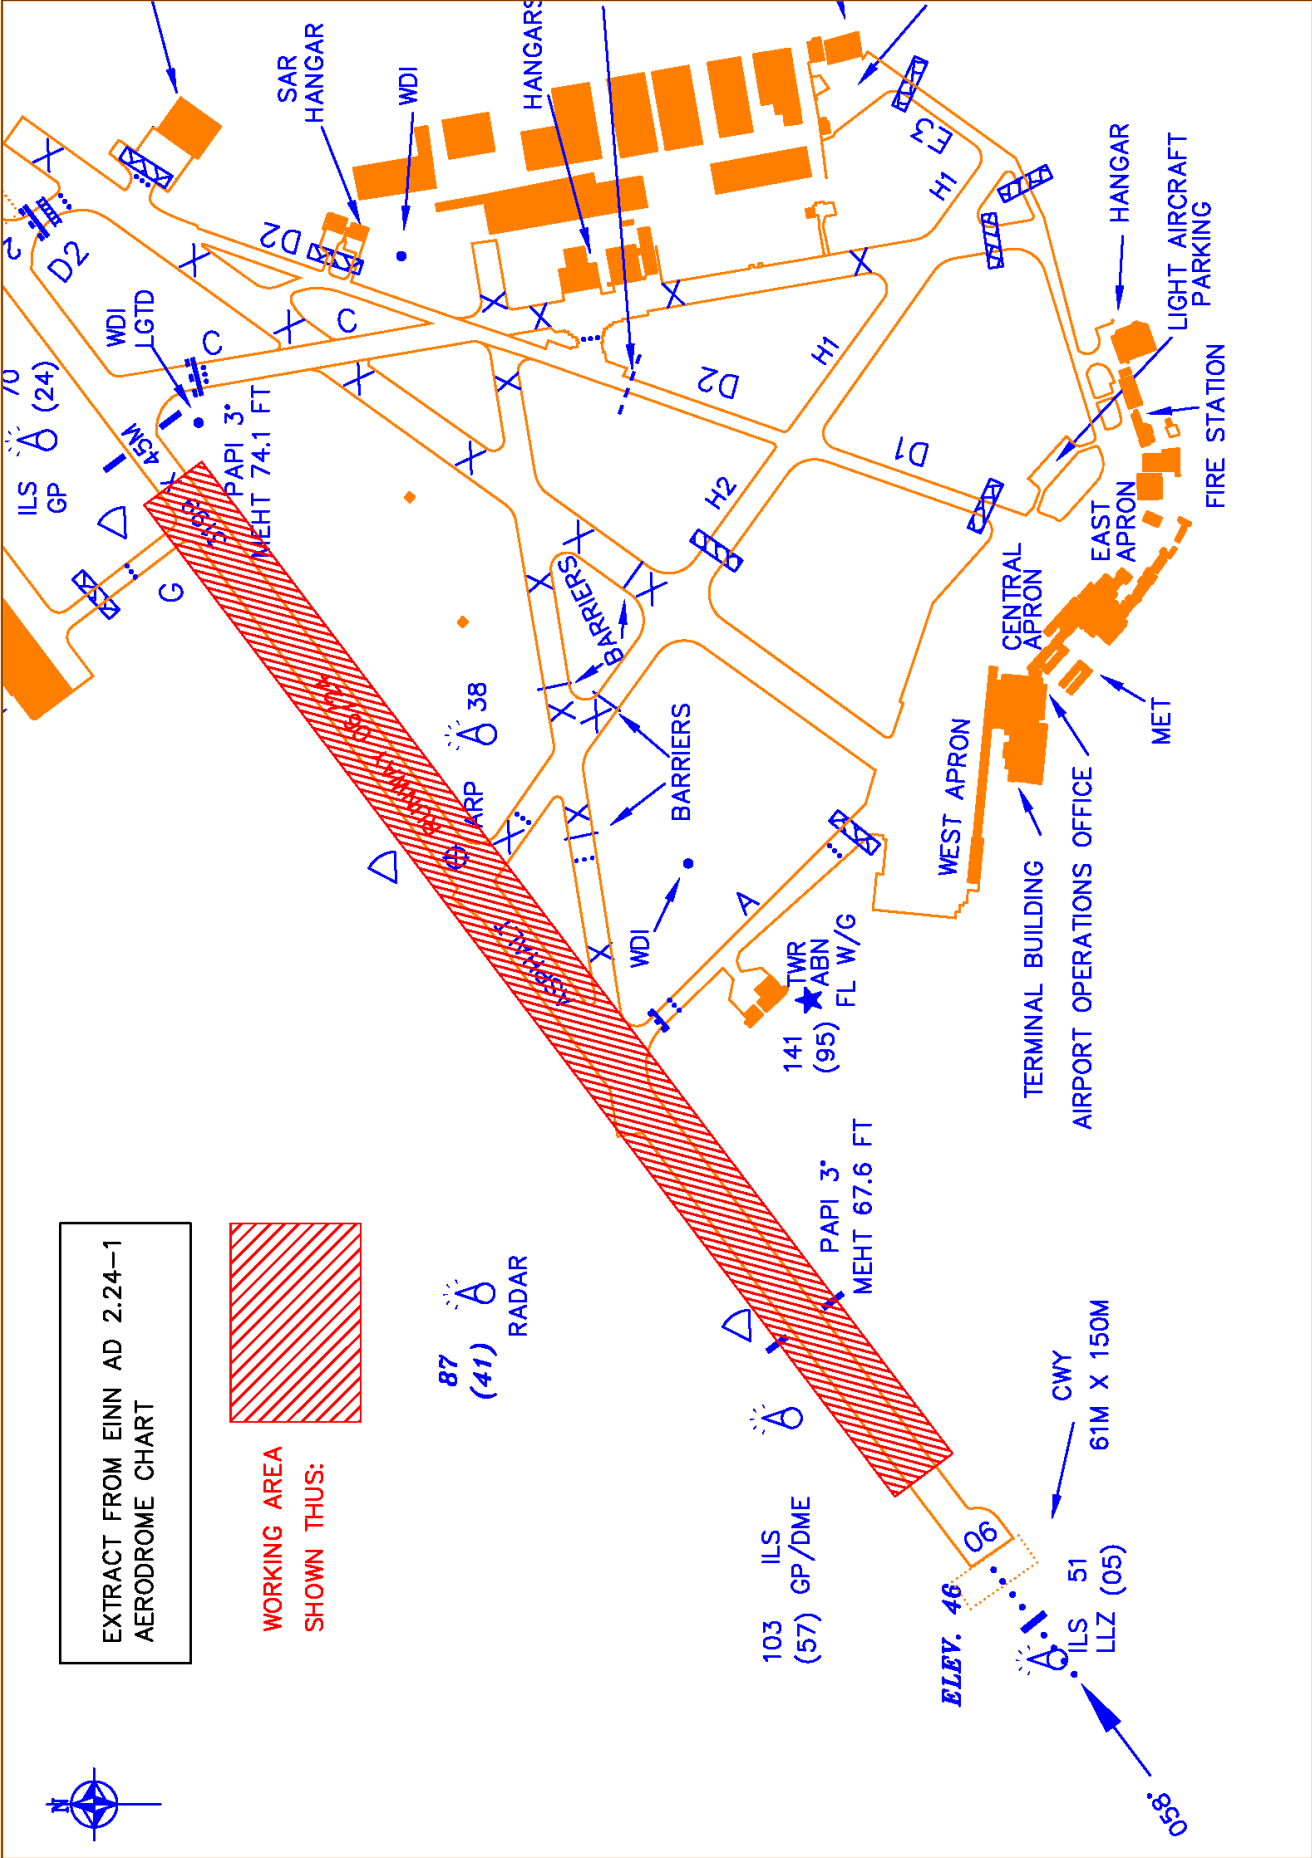

AERONAUTICAL INFORMATION 2 MAR 2017