


AERODROME CHART - ICAO 52 10 51.16 N AERODROME ELEV 112FT
009 31 25.62 W APRON ELEV 78FT

TWR 123.325
GND 121.600
ATIS 118.025


CONSULT NOTAM
FOR LATEST
INFORMATION

KERRY AIRPORT/ IRELAND


RWY	DIRECTION	THR		BEARING STRENGTH	LEGEND		
		52 10 40.75 N	009 32 15.46 W		AIRCRAFT STAND	1	
08	076°	52 10 40.75 N	009 32 15.46 W	PCN 44/F/C/W/T	RUNWAY HOLDING POSITION MARKING	≡≡≡≡	
26	256°	52 11 01.56 N	009 30 35.78 W		DISUSED PAVEMENT	X X X	

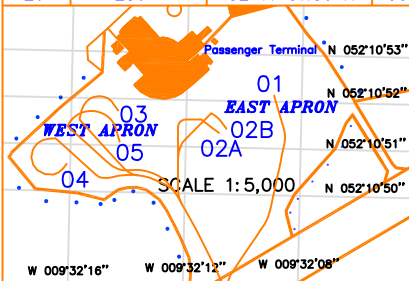

BEARINGS ARE MAGNETIC.
LINEAR DIMENSIONS IN METRES.
ELEVATIONS IN FEET AMSL.
HEIGHTS IN FEET ABOVE AERODROME ELEVATION SHOWN IN BRACKETS.

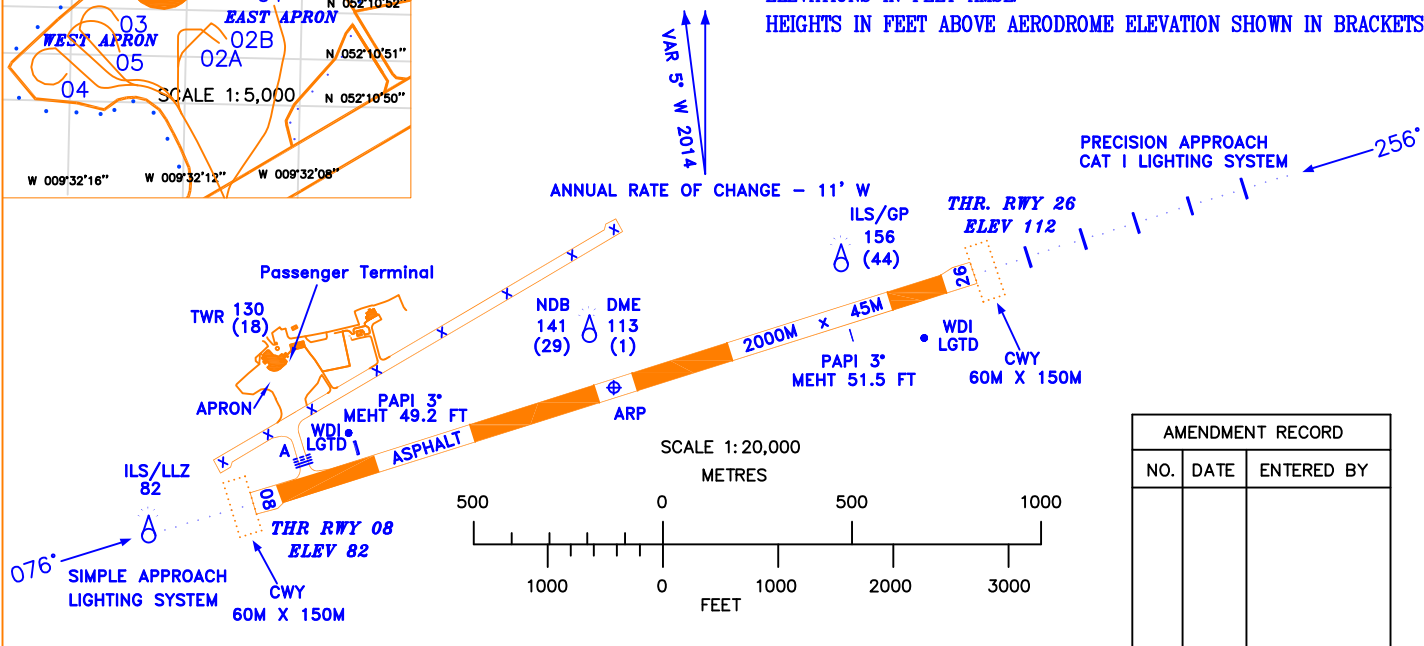

AMENDMENT RECORD		
NO.	DATE	ENTERED BY

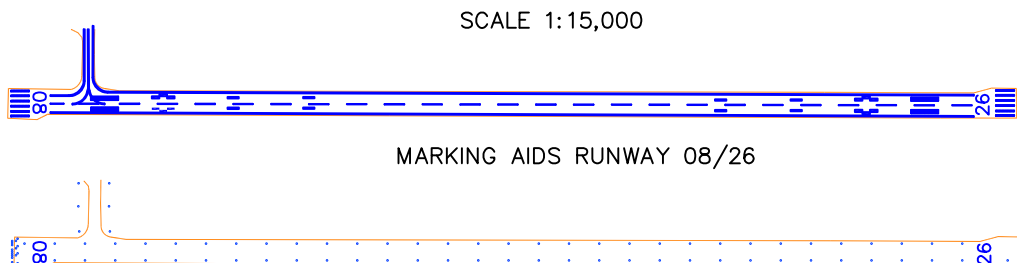

Stand	Latitude	Longitude	Max Wingspan	Max Length	Conditions
1	52 10 52.14 N	009 32 09.00 W	38.06	47.33	Self Manoeuvring.
2A	52 10 51.32 N	009 32 10.91 W	28.88	36.40	Self Manoeuvring Stand 2B Vacant
2B	52 10 51.41 N	009 32 10.65 W	35.79	44.50	Self Manoeuvring Stand 2A Vacant
3	52 10 51.76 N	009 32 14.46 W	29.00	25.25	Self Manoeuvring Stand 5 Vacant
4	52 10 50.57 N	009 32 16.22 W	29.00	25.25	Self Manoeuvring Stand 5 Vacant
5	52 10 51.09 N	009 32 14.38 W	34.15	44.50	Self Manoeuvring Stands 3 and 4 Vacant

NOTE 1: TAXIWAY A, EAST APRON : PCN 44/F/C/W/T.
NOTE 2: WEST APRON : PCN 44/F/C/W/U.
NOTE 3: TAXIWAY A : 23M WIDE.
NOTE 4: APRON SURFACE : CONCRETE AND ASPHALT.
NOTE 5: FORWARD SCATTER VISIBILITY METER AVAILABLE ON APPROACH 26.

CHANGES: MAGNETIC VARIATION, RUNWAY BEARINGS AND REMOVAL OF AERODROME BEACON